


DELMAG Rope Suspended Leads

DELMAG „EU-type“ offshore leads guide the hammer in „riding-hammer“ applications, such as driving of single piles (pipe piles, king piles, etc.). For inclined pile driving (max. 1:4) a hydraulic tripping device is recommended.

Leads		EU 62-36	EU 62-42	EU 100-48	EU 100-60	EU 150-60	EU 200-60	EU 200-84
Suitable diesel pile hammer (max. size)		D62-22	D62-22	D100-13	D100-13	D150-42	D200-42	D200-42
Max. pipe diameter	mm	915	1076	1220	1524	1524	1524	2135
Weight of lead system without hammer	kg	7300	8200	9300	11400	17000	28500	40200



Rope suspended lead EU 62-42 with diesel pile hammer D62-22 in England

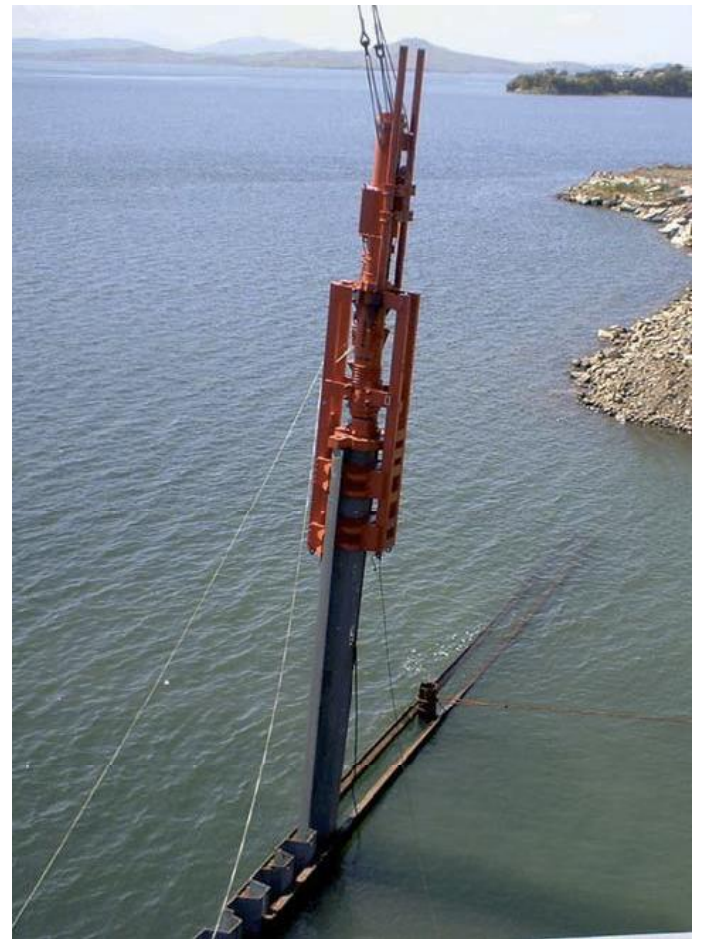

Rope suspended lead MAS 3000 with diesel pile hammer D25-32 in Russia